


# FLUIDRAIN®

Electronic timer controlled condensate drain

## DIMENSIONS MM

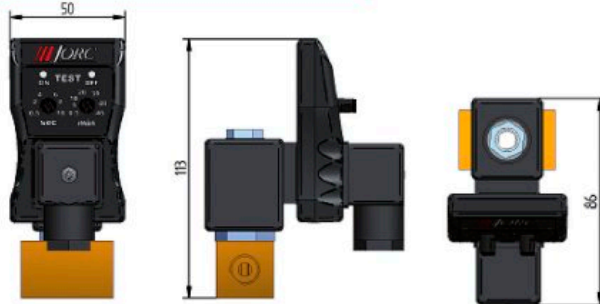

## SPECIFICATIONS

### TIMER

Interval time	0.5 - 45 minutes, adjustable
Discharge time	0.5 - 10 seconds, adjustable
Supply voltage options	12 - 380 VAC/DC, 50/60 Hz
Current consumption	4mA maximum
Operating temperature	-40° C to +55° C
Environmental protection	IP 65, NEMA 4 when installed
Housing material	ABS plastic FR grade
Connection	DIN 43650A ISO 4400
Indicators	1 LED (yellow) indicating ON 1 LED (yellow) indicating OFF

### VALVE

Type	2/2 way direct acting
In/out ports	1/8", 1/4", 3/8" & 1/2" BSP or NPT
Pressure range	0 - 16 bar g (For higher pressures up to 500 bar – consult factory)
Temperature range.	2° C/55° C ambient
Medium temp.	Max. 55° C
Valve body	Brass, orifice 4.5 mm (stainless steel available)
Supply voltage options	12 - 380 VAC/DC, 50/60 Hz (100% ED)
Coil Insulation Grade	H-grade
Environmental Protection	IP 65
Valve seal	FPM
See coil for correct voltage	Voltage tolerance +/- 10%

**JORC IS ISO 9001:2000 CERTIFIED**

Information provided herewith is believed to be accurate and reliable. However, no responsibility is assumed for its use or for any infringement of patents or rights of others, which may result from its use. In addition, JORC reserves the right to revise information without notice and without incurring any obligation.

<b>JORC Industrial BV</b>	Tel	+31 45 524 24 27
Pretoriastraat 28	Fax	+31 45 524 19 79
NL-6413 NN Heerlen	E-mail	info@jorc.nl
The Netherlands	http://	www.jorc.eu

CE

UL US

