




Fibre optic through-beam sensor

FE-00-A-A-R3

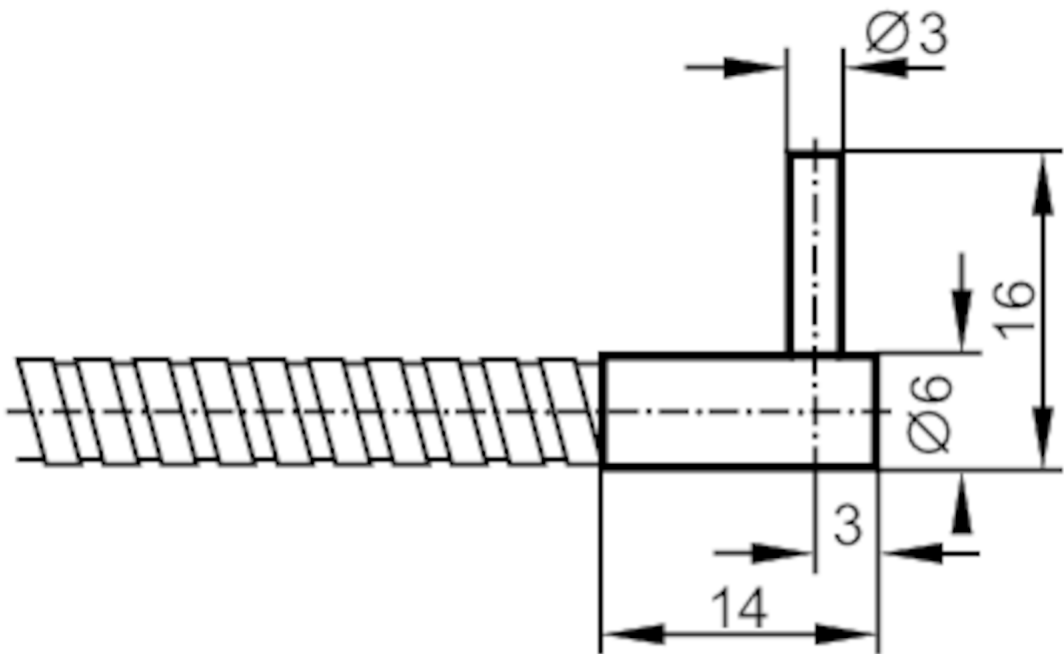

Application		
Function principle		Through-beam sensor
Application		High temperature resistance; Robust design for use in harsh industrial environments
Detection zone		
Range with fibre-optic amplifier type		OKF; OOF; OUF
OKF		
Range of fibre optics	[mm]	120
OOF		
Range of fibre optics	[mm]	400
OUF		
Range of fibre optics	[mm]	120
Operating conditions		
Ambient temperature	[°C]	-40...290
Mechanical data		
Weight	[g]	69
Version of sensing head		angled
Sensing head diameter	[mm]	3
Sensing head length	[mm]	10
Total length	[mm]	600

E20129



Fibre optic through-beam sensor

FE-00-A-A-R3

Min. bending radius	[mm]	20; (for fixed installation)
Fibre arrangement		
Materials		Adapter: ABS
Fibre material		glass
Fibre head material		aluminium
Fibre sheath material		aluminium
Accessories		
Items supplied		E20103
Remarks		
Pack quantity		1 pcs.